

ADDENDUM NO. 2
TO THE BID DOCUMENTS
Main Street Sidewalk Improvement
CITY OF HOMER, ALASKA

Addendum Issue Date: April 27, 2022

Bid Submittal Date: May 3, 2022

Previous Addenda Issued: None

Issued By: Janette Keiser, PE
Public Works Director
City of Homer

Notice to Bidders:

Bidders must **acknowledge receipt of this addendum** by including the Addenda Acknowledgement Form with the bid.

Bidders are required to acknowledge each addenda separately on the Addenda Acknowledgement Form. Any bids received without acknowledgment of addenda may be rejected prior to evaluation.

The Bid Documents for the above project are amended as follows (all other terms and conditions remain unchanged):

A prospective bidder brought up two concerns:

1. **Concern:** The plans do not have a detail attached for “Adjust Fire Hydrants”. This is a problem because they do not know what height the risers should be.


Response: The City of Homer Standard detail 600.04 is attached to this addendum for reference. The table below shows the height adjustments that will need to be made to the fire hydrants. Be aware that these adjustments are **approximations only** and that actual on-site conditions may require these adjustments to vary.

Station	Approximate Height Adjustment
16+53.55	+1.5 ft.
20+49.08	+1.0 ft.
36+27.47	+1.0 ft.

2. **Concern:** The plans do not show radii for any of the curb ramps.

Response: All proposed curb radii for the Main Street Sidewalk Improvements project are 28-ft at the top back of curb.

BOLLARD — REFER TO STANDARD DETAIL

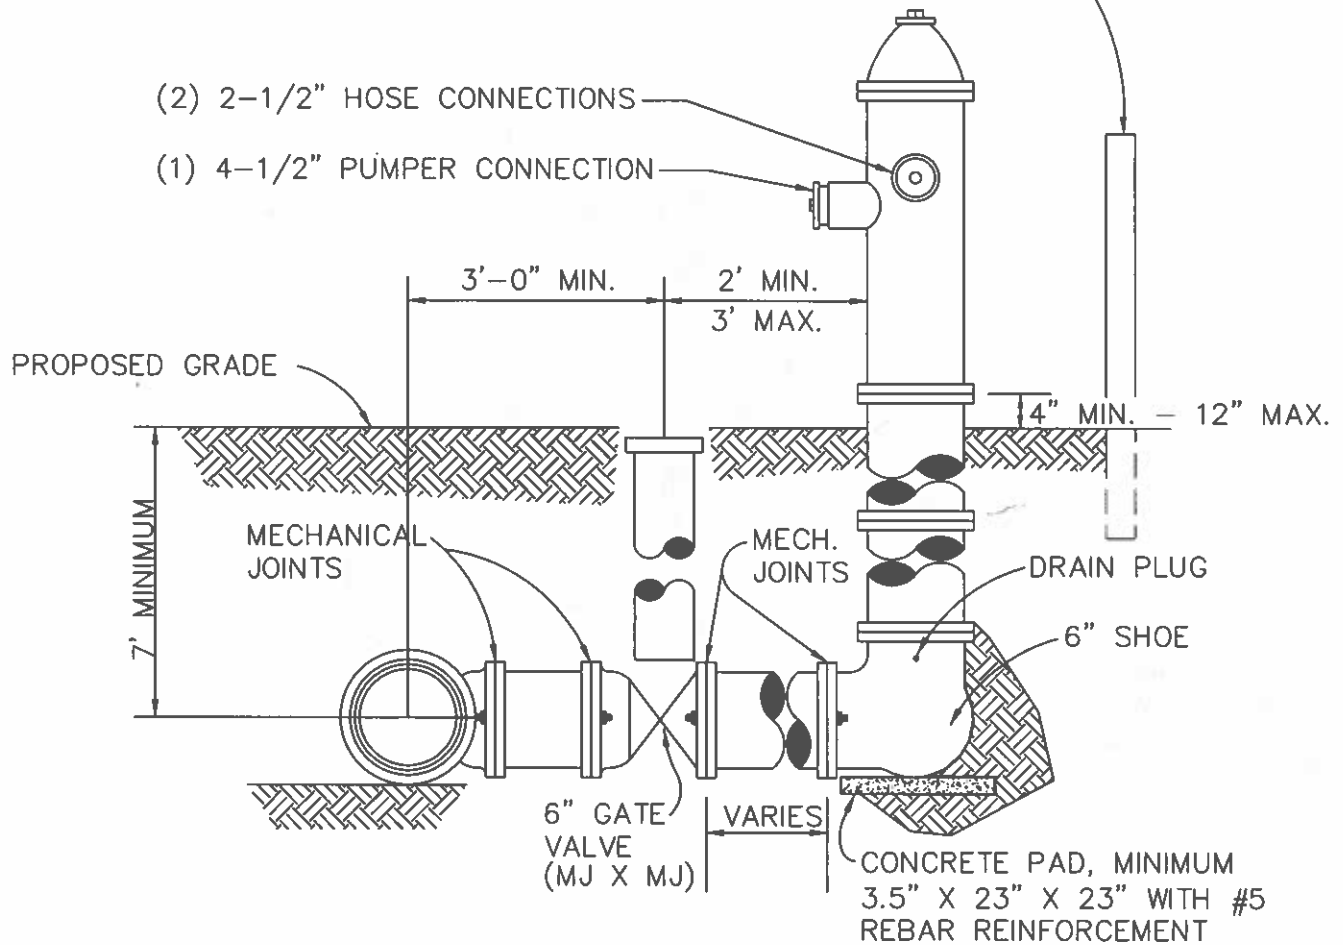

HYDRANT INSTALLATION NOTES:

1. HYDRANT BARREL MUST BE INSTALLED PLUMB AND THE LEG MUST BE INSTALLED LEVEL.
2. DRAIN PLUG TO BE INSTALLED BY CONTRACTOR.
3. ALL HYDRANTS SHALL BE PAINTED WITH SHERWIN/WILLIAMS YELLOW (FEDERAL SPECIFICATION #13538).
4. AUXILLIARY GATE VALVE BOX TO BE INSTALLED ACCORDING TO DETAIL FOR TYPICAL VALVE BOX.
5. USE MEGALUG RESTRAINTS ON ALL MECHANICAL JOINTS



SCALE:
NTS

REVISED:
1/2008

**SINGLE PUMPER "L" BASE
HYDRANT ASSEMBLY**

DETAIL #

600.04