





# Homer Fishing Hole HC Ramp Improvements

## Legend

-  Feature 1
-  Feature 2
-  Heritage RV Park
-  Homer Spit's "Fishing Hole", Homer, Alaska

REMOVE  
THREE RAMP  
PANELS

SMOOTH ABRUPT RAMP  
PANEL TRANSITIONS USING  
GROUT (4 LOCATION)


REMOVE 400 LF EXIST.  
WHEEL STOPS/REPLACE  
WITH NEW PLASTIC  
TIMBERS/SPACERS

RAISE AND  
LEVEL TWO  
RAMP PANELS

INSTALL 32 LF OF  
2'x2'x4' CONCRETE  
BLOCK EROSION  
PROTECTION

INSTALL 200 LF OF 2'x2'x4'  
CONCRETE BLOCK  
RETAINING WALL (TWO  
BLOCK HIGH)



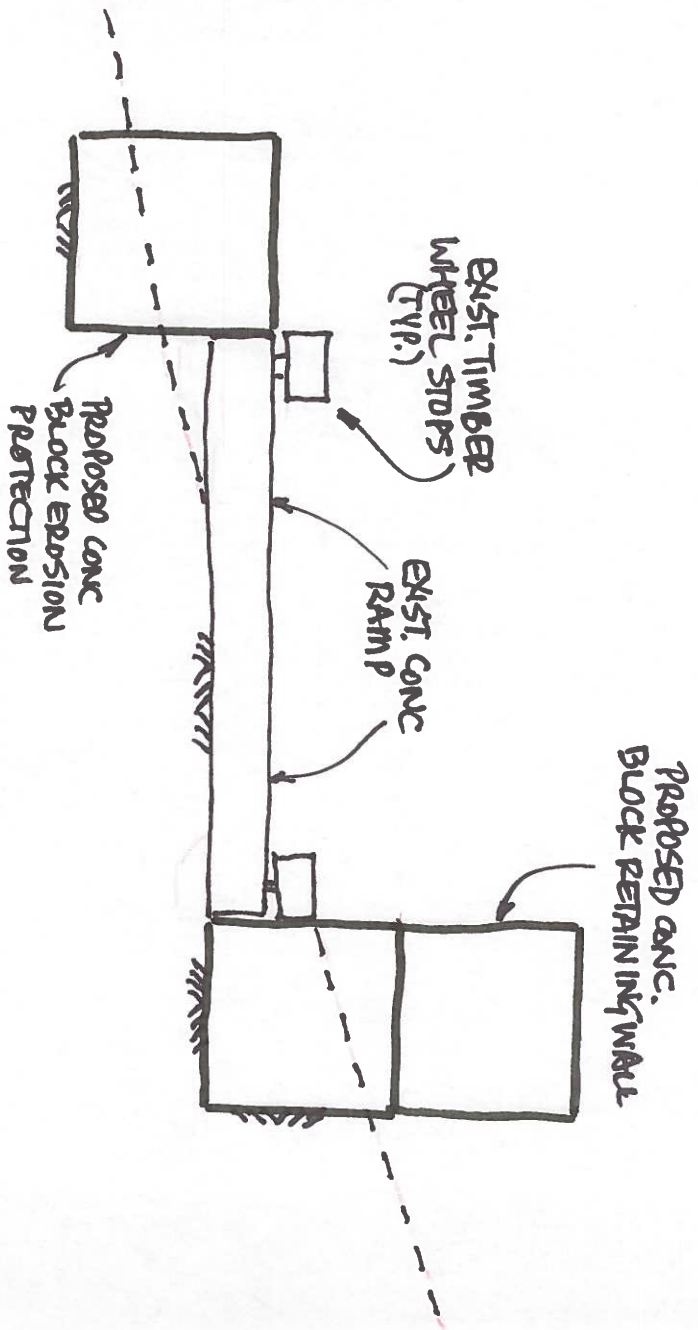

SECTION A-A

Concept Cost Estimate  
Homer Fishing Hole HC Ramp Improvements

Item of Work

	Quantity	Unit	Unit Price	Cost
Concrete Block (Two High) Retaining Wall	200	LF	195	\$39,000
Concrete Block (One High) Erosion Control	32	LF	100	\$3,200
Raise and Level Existing Ramp Panels	3	EA	933	\$2,799
Remove Existing Timber Wheel Stops	400	LF	12	\$4,800
Remove Existing Ramp Panels	3	EA	1550	\$4,650
Grout Panel Transitions to Smooth	4	EA	450	\$1,800
Project Design/Construction Administration	32	HR	95	3040

Grant	Force Account
-------	---------------

\$39,000	
\$3,200	
\$2,800	
	\$4,800
	\$4,650
	\$1,800
	\$4,500

Total Project

\$59,289

\$45,000

\$15,750